
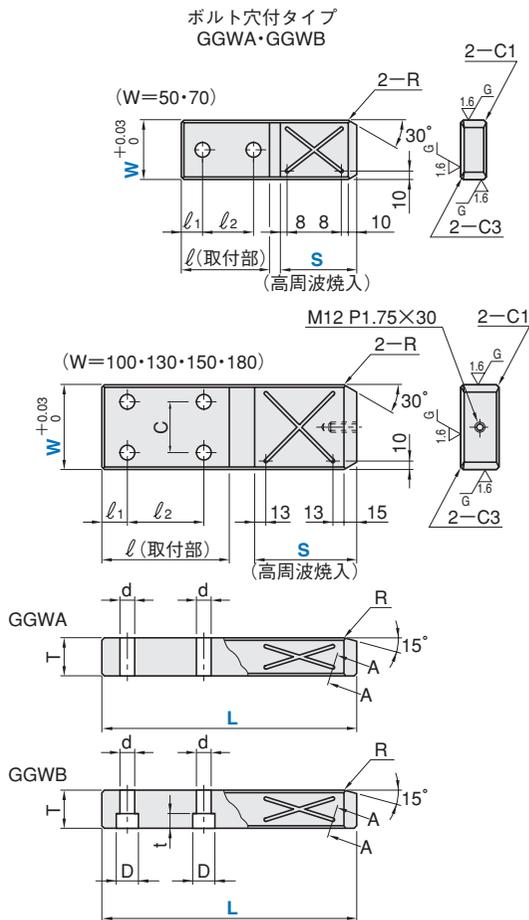


ヒールガイドプレート

RoHS10

材質	硬度	Code
S45C	スライド部 55HRC~ (高周波焼入)	GGW GGWA GGWB

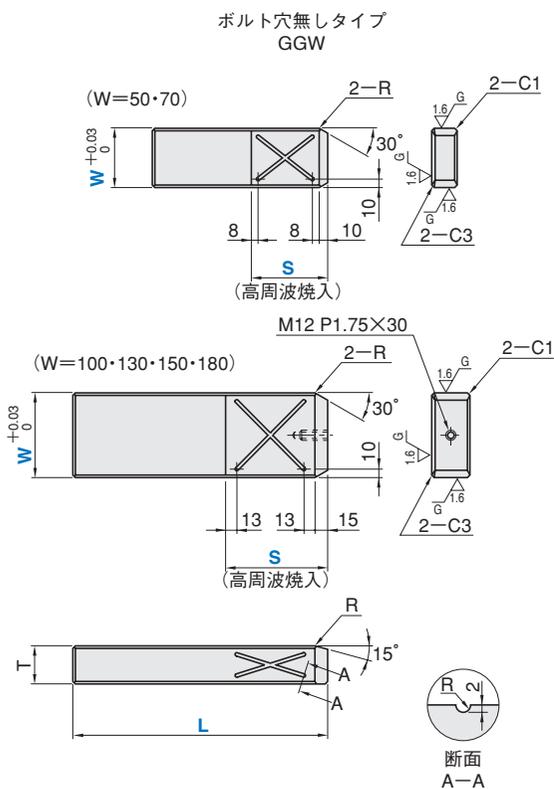

Code No.		S	φ10 L	T	GGWA・GGWB							(1) 質量kg	@P(1~9P)		
Code	W				ℓ	ℓ1	ℓ2	C	d	D	t		GGW	GGWA	GGWB
GGW GGWA GGWB	50	60	150~180	30	90	20	50	-	18	26	18	2.2	6,260	6,500	6,640
		90	190~250									3.0	7,320	7,570	7,690
	70	90	200~250	35	110	25	60	-	18	26	18	4.9	8,700	8,960	9,080
		120	230~350									6.9	10,490	10,760	10,940
	100	120	270~320	45	150	30	90	60	18	26	18	11.5	12,860	13,400	13,580
		180	330~400									14.4	15,230	15,680	15,960
	130	150	300~380	50	150	30	90	80	22	32	22	19.8	16,690	17,420	17,690
		210	390~500		180		120					26.0	19,700	20,340	20,700
	150	180	340~450	60	160	35	90	100	22	32	22	32.4	21,430	22,070	22,440
		240	460~550		220		150					39.6	24,530	25,260	25,540
	180	200	380~470	180	110	120	40.6	29,280	29,920	30,280					

▲ (1)はGGW Lmax時の質量(参考値)です。



Code No. | S | L
GGWA50 - 60 - 150



▶数量別割引価格 ☎ P.40 (▲1円未満切り捨て)

1~9	10~19	20~29	30~50	51~
100%	95%	90%	85%	お見積



5 日目 発送 ☎ P.40